



Flexibility, performance and value

YourHome SylSpot



The versatile SylSpot range provides outstanding value and comes in both IP44 adjustable and IP65 fixed, with Warm White, Cool White and Daylight, colour temperature models available. A Homelight/Warm/Cool 3-colour CCT spotlight is also offered, which allows the installer to select the most suitable colour temperature for the room or application, via a 3-way switch. The SylSpot range has an integrated LED driver, polycarbonate body and a low profile of 46mm (47mm for IP65 versions) making it ideal to fit into low ceiling voids.

IP44 SylSpot is ideal for kitchens and living rooms with 30° tilt which allows you to place light exactly where you want it. The unique lens gives the product the highly desirable "halogen sparkle". The IP65 SylSpot is ideal for bathrooms and suitable for zone 1. It is fixed and comes with the same unique lens as the IP44 versions.

The range now features an IP65 PIR model with motion sensor technology.



Features


- Integrated LED accent downlight with high lumen efficacy
- Low profile of 46mm (47mm for IP65 versions) and loop-in/loop-out wiring with fast terminals
- Black or silver bezels with fast snap-on mounting available on selected products
- IP44 version available in tilt and with unique lens design, beam angle 38°
- IP65 version fixed with unique lens, beam angle 38°
- IP65 PIR model with motions sensor
- Cut-out of 68mm allows direct replacement of most halogen spots installed in the market
- Non-dimmable, dimmable with leading edge/trailing edge dimmers
- Light output up to 550lm with efficiency up to 100lm/W (3CCT)
- Good colour rendering index, CRI>80
- Multiple colour temperature options:
 - Single colour temperature; 3000K (Warm white), 4000K (Cool white) and 6500 (Daylight)
- Variable CCT model 2700K-3000K-4000K (Homelight-Warm white, Coolwhite selected by 3-way switch on installation)
- 'Dim to Warm' option; 3000K (Warm white) to 2200K (Candlelight), as you dim the spotlight the colour temperature gets warmer
- Pack of three and six fixtures available, choice of non dimmable, IP44 or IP65
- Lifetime: 36,000 hours at L70

Product information


Code	Description	Correlated Colour Temperature (K)	Colour Rendering Index	Nominal Beam Angle (°)	Fixture Lumen (lm)	Total Power Consumption (W)	Efficiency (lm/W)	Recessed Depth (mm)	Outer Diameter (mm)	Voltage (V AC)
Non-Dimmable										
Non-Dimmable IP44										
0090011	SylSpot 500lm 830 IP44 WHT	3000	80	38	500	4.8	104	46	87	220-240
0090012	SylSpot 500lm 840 IP44 WHT	4000	80	38	500	4.8	104	46	87	220-240
0090013	SylSpot 500lm 865 IP44 WHT	4000	80	38	500	4.8	104	46	87	220-240
Non-Dimmable IP65										
0090014	SylSpot 500lm 830 IP65 WHT	3000	80	100	500	4.8	104	47	87	220-240
0090015	SylSpot 500lm 840 IP65 WHT	4000	80	100	500	4.8	104	47	87	220-240
0090016	SylSpot 500lm 865 IP65 WHT	4000	80	100	500	4.8	104	47	87	220-240
Dimmable										
Dimmable IP44 (3-CCT)										
0090018	SylSpot 550lm 3-CCT IP44 DIM WHT	2700/3000/4000	80	38	550	5.5	100	46	87	220-240
0090029	SylSpot 550lm 3-CCT IP44 DIM BLCK	2700/3000/4000	80	38	550	5.5	100	46	87	220-240
Dimmable IP65 (3-CCT)										
0090017	SylSpot 550lm 3-CCT IP65 DIM WHT	2700/3000/4000	80	38	550	5.5	100	47	87	220-240
0090028	SylSpot 550lm 3-CCT IP65 DIM BLCK	2700/3000/4000	80	38	550	5.5	100	47	87	220-240
Dim to Warm										
0005282	SylSpot 500lm IP65 SUNDIM WHT	3000-2200	80	100	500	7	71	47	87	220-240
Triple Packs										
Non-Dimmable IP44										
0090020	SylSpot 500lm 830 IP44 WHT 3-PACK	3000	80	38	500	4.8	104	46	87	220-240
0090021	SylSpot 500lm 840 IP44 WHT 3-PACK	4000	80	38	500	4.8	104	46	87	220-240
Non-Dimmable IP65										
0090022	SylSpot 500lm 830 IP65 WHT 3-PACK	3000	80	38	500	4.8	104	47	87	220-240
0090023	SylSpot 500lm 840 IP65 WHT 3-PACK	4000	80	38	500	4.8	104	47	87	220-240
Dimmable IP44 (3-CCT)										
0090030	SylSpot 550lm 3-CCT IP44 D WH 3-PACK	2700/3000/4000	80	38	550	5.5	100	46	87	220-240
Dimmable IP65 (3-CCT)										
0090031	SylSpot 550lm 3-CCT IP65 D WH 3-PACK	2700/3000/4000	80	38	550	5.5	100	47	87	220-240
Six Packs										
Non-Dimmable IP44										
0005285	SylSpot 500lm 830 IP44 WHT 6-PACK	3000	80	38	500	4.8	104	46	87	220-240
0005286	SylSpot 500lm 840 IP44 WHT 6-PACK	4000	80	38	500	4.8	104	46	87	220-240
Non-Dimmable IP65										
0090026	SylSpot 500lm 830 IP65 WHT 6-PACK	3000	80	38	500	4.8	104	47	87	220-240
0090027	SylSpot 500lm 840 IP65 WHT 6-PACK	4000	80	38	500	4.8	104	47	87	220-240
IP65 PIR 3CCT										
0090038	SYLSPOT PIR 600/1050LM 3-CCT IP65 DIM WH	2700/3000/4000	80	50	6W 600-670 10W 950-1050*	6/10	110	31.7	86	220-240

Photometric Data


IP44 3000K

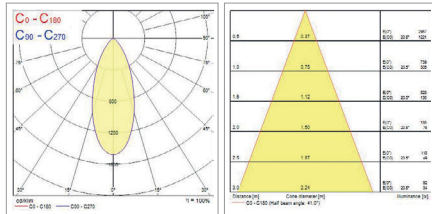


IP65 3000K

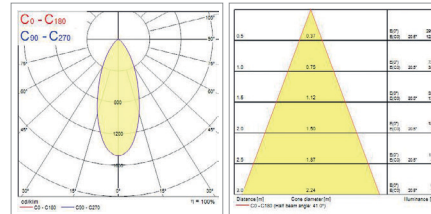


IP65 SUNDIM

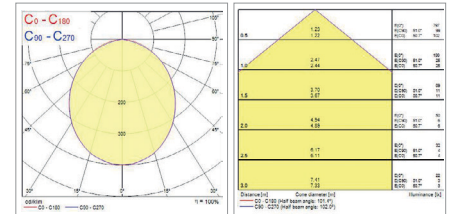


IP44 2700K (3CCT)

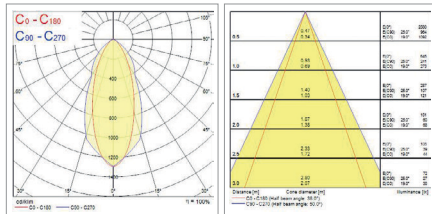


IP44 3000K (3CCT)

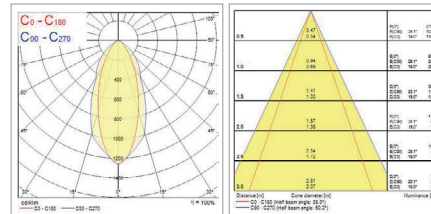


IP44 4000 (3CCT)

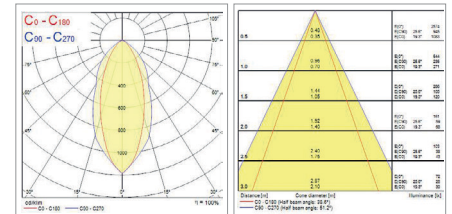


IP65 2700K (3CCT)

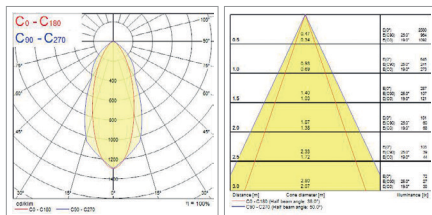


IP65 3000K (3CCT)

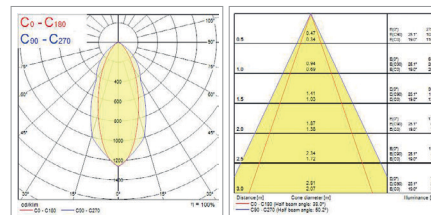


IP65 4000K (3CCT)

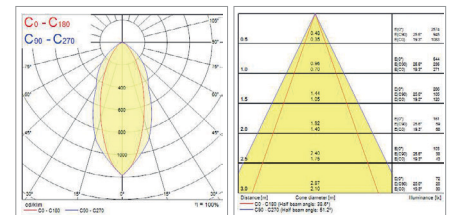


IP65 PIR (3CCT)

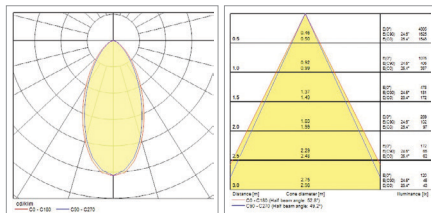


Dimensions (mm)

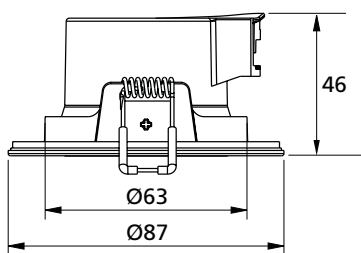

SylSpot IP44

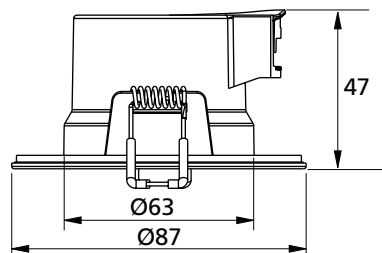

SylSpot IP65

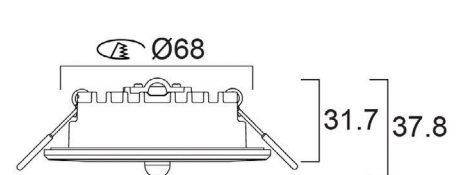

SylSpot IP65 PIR (3CCT)

Additional Images


White IP44



White IP65



Silver IP44

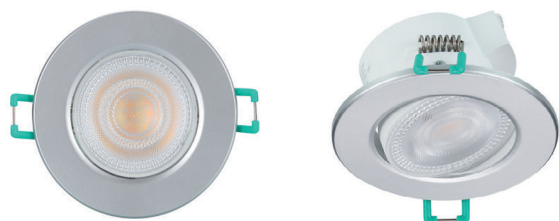

Silver IP65



Black IP44




Black IP65



CCT Switch (3-CCT)



SUNDIM

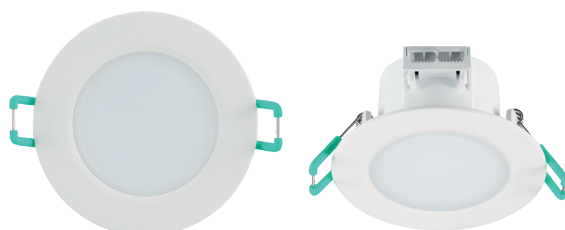

PIR

