

1160

1000

85

60

25

60

25

85

39,37" X 39,37"

PORCELÁNICO-PORCELAIN TILES
RECTIFICADO - RECTIFIED -

100x100 cm

MODEL / MODELO: **BOTTICELLI BLANCO**

QUALITY / CUALIDAD: 1
OPERATOR/OPERARIO: 4
CALIBER / CALIBRE: 5
SHADE / TONO: steenlook

PEZAS/CAJA: 2
METROS/CAJA: 2

Baldosas prensadas en seco,
ISO 13006 (2022) Anexo G
Bla. M 100 cm x 100 cm
W (1000 mm x 1000 mm x 10,2 mm) GL
1ér choix




MANUFACTURER NAME	NEW TILES S.L.
QUALITY CERTIFICATE	ISO 13006 (2022) Anexo G
PRODUCT CODE	1000 mm x 1000 mm x 10,2 mm
GLAZING	GLAZED
FINISH	STEENLOOK
PACKAGING	25 pieces per box
WEIGHT	20,4 kg per box
AREA	1,02 m ² per box
WATER ABSORPTION	≤ 0,5%
MOISTURE COEFFICIENT	0,0015
SLIP RESISTANCE	PEAK R10
WARRANTY	10 years
CONTACT	newtiles.com

ISO 13006 - EN 14411
AN. G Group Bla/GL

41431046

DO NOT DRY CUT USING MOTORIZED EQUIPMENT DUE TO THE POTENTIAL FOR EXPOSURE TO HARMFUL SILICA DUST. USE OF A WET SAW OR A SCORE & SNAP TOOL WHEN CUTTING IS NECESSARY DURING THE INSTALLATION PROCESS.

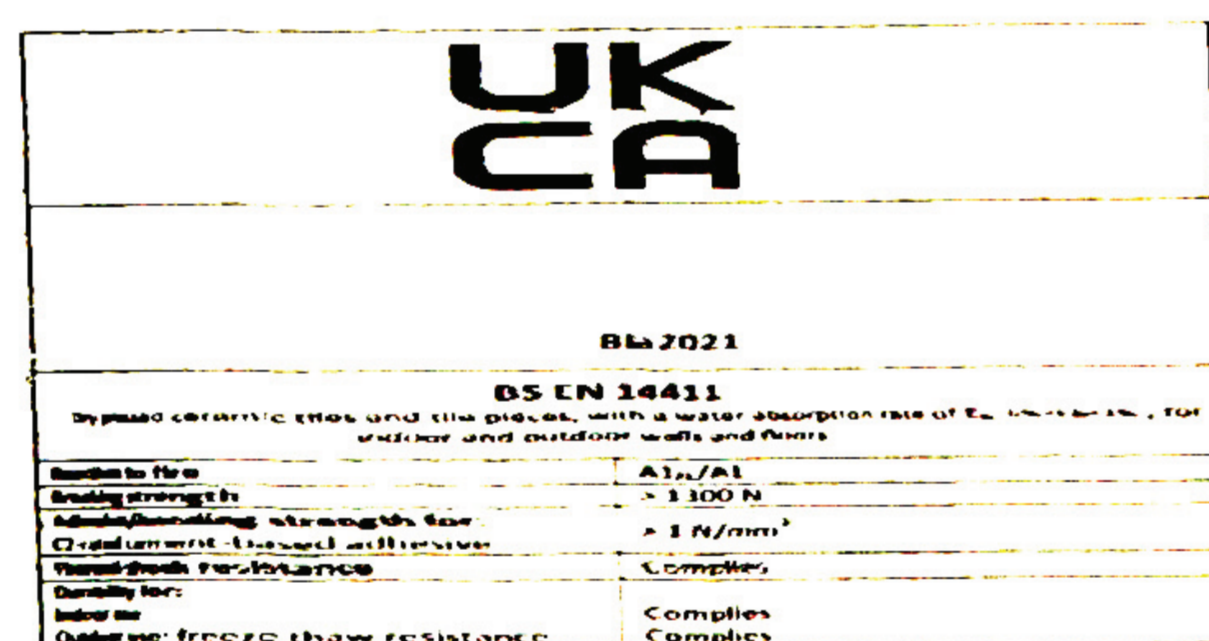

اي معالجة تمت على سطحها بعد عملية الحرق. معتمدين
رقم الإنتاج أو رقم الفعلة حسب التسمية المناسبة
وزن الوزن و اللون - حسب التسمية المناسبة
عدد البلاط
إلتك: 526550974243


Porcelánico / Porcelain Tile
100 cm x 100 cm
39,37" x 39,37" aprox.
GLAZED PORCELAIN



New Tiles

CE NEW TILES S.L. CARBONERA - C/1 - E-60 KM 10 - VILLAFRANCA - 12192 ES Nº REG. 1012 Nº REG. 1012	CLASSIFICATION (EN 12004) PEAK R10	WATER ABSORPTION (EN 12004) ≤ 0,5%	MOISTURE COEFFICIENT (EN 12004) 0,0015
--	---------------------------------------	---------------------------------------	---

Contact:
New Tiles
Carretera Castellón 19
ESP-12110 Alcorca (Castellón)
info@new-tiles.com

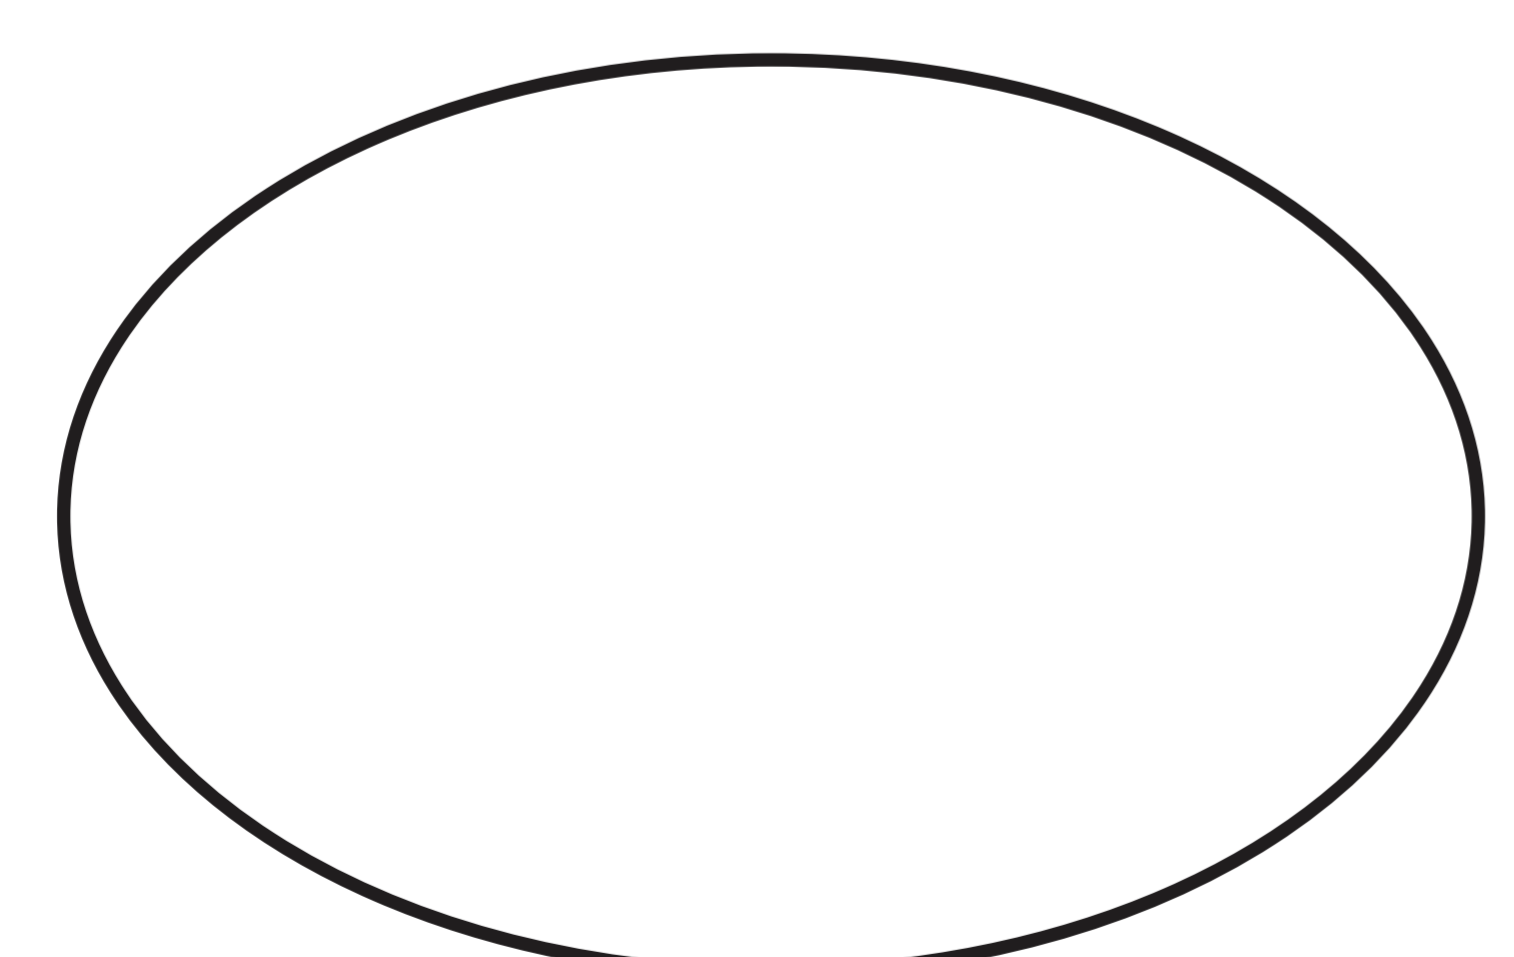

ISO 13006 - EN 14411 AN. G Group Bla/GL
DO NOT DRY CUT USING MOTORIZED EQUIPMENT DUE TO THE POTENTIAL FOR EXPOSURE TO HARMFUL SILICA DUST. USE OF A WET SAW OR A SCORE & SNAP TOOL WHEN CUTTING IS NECESSARY DURING THE INSTALLATION PROCESS.
NEW TILES S.L. CARBONERA - C/1 - E-60 KM 10 - VILLAFRANCA - 12192 ES Nº REG. 1012 Nº REG. 1012
CLASSIFICATION (EN 12004) PEAK R10
WATER ABSORPTION (EN 12004) ≤ 0,5%
MOISTURE COEFFICIENT (EN 12004) 0,0015
Contact: New Tiles Carretera Castellón 19 ESP-12110 Alcorca (Castellón) info@new-tiles.com
ISO 13006 - EN 14411 AN. G Group Bla/GL
DO NOT DRY CUT USING MOTORIZED EQUIPMENT DUE TO THE POTENTIAL FOR EXPOSURE TO HARMFUL SILICA DUST. USE OF A WET SAW OR A SCORE & SNAP TOOL WHEN CUTTING IS NECESSARY DURING THE INSTALLATION PROCESS.
NEW TILES S.L. CARBONERA - C/1 - E-60 KM 10 - VILLAFRANCA - 12192 ES Nº REG. 1012 Nº REG. 1012
CLASSIFICATION (EN 12004) PEAK R10
WATER ABSORPTION (EN 12004) ≤ 0,5%
MOISTURE COEFFICIENT (EN 12004) 0,0015
Contact: New Tiles Carretera Castellón 19 ESP-12110 Alcorca (Castellón) info@new-tiles.com