

AD6-CP

Aerosol Generator

Fluorine Free

0.6 kg

Temperature ranges
0°C + 50°C

ANAFGROUP

BODY

ALUMINUM

Seamless, deep and drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling.

VALVE

ACETALYC RESIN

(Aerosol) with cap and button sprayer.

EXTINGUISHING AGENT

Sorik Plus. All parts in contact with the extinguishing agent are compatible.

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added to allow electronic leak detection.

PACKAGING

6 pieces cardboard box, robust and suitable for transport.



Configuration

● Standard

○ On request

ADDITIONAL FEATURES




○ PERSONALIZED SCREEN PRINTING SPRAY
4 COLOURS



○ SCREEN PRINTING SPRAY 4 COLOURS
STANDARD

Technical data

FIRE RATINGS	5A 5F	
CHARGE	0.6 kg 0 / -5%	
MATERIAL	Aluminum	
CYLINDER	Manufacturing process	
	External painting	
	Corrosion resistance	
EXTINGUISHING AGENT	Foam AFFF	
PROPELLANT	N2 + HE	
DISCHARGE	Discharge time	~ 0 s
	Operating pressure at 20 °C	11 bar
	Operating pressure at 0 °C	9 bar
DIMENSIONS	Overall height	285 mm
	Bottle outer diameter	74 mm
WEIGHT	Empty / Charged	0.13 kg / 0.73 kg
PACKING SPECIFICATIONS	Standard packing	6 Pieces cardboard box
	Carton size (B x L x H)	240 x 160 x 310 mm
	Weight per carton	4.6 kg
	Pallet	125 Cartons
	Pallet size (B x L x H)	800 x 1200 x 1760 mm
	Pallet volume	1.69 m3
	Weight per pallet (net/gross)	575 kg / 600 kg

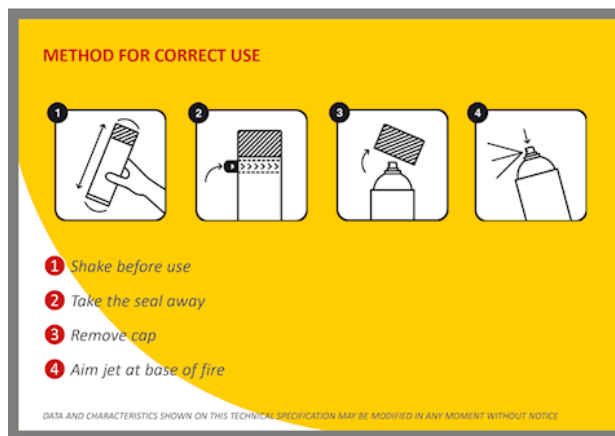

ANAF Fire Protection

Via del Commercio, 4 - Torre d'Isola (Pavia) - Tel. 0382.4533 Fax. 0382.920279
info@anaf.eu | www.anaf.eu