
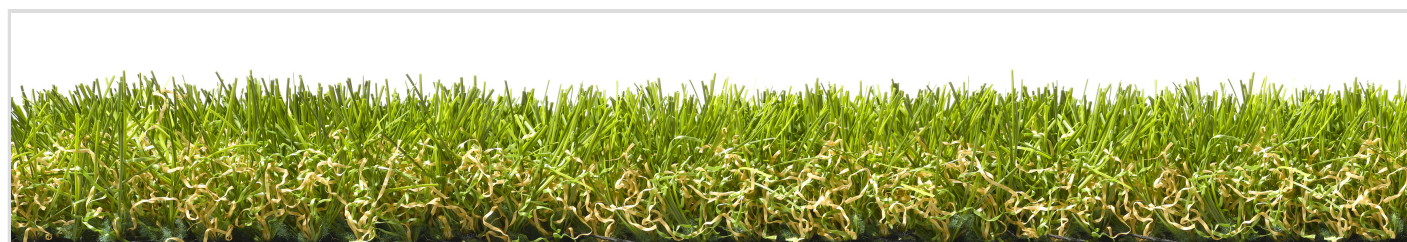
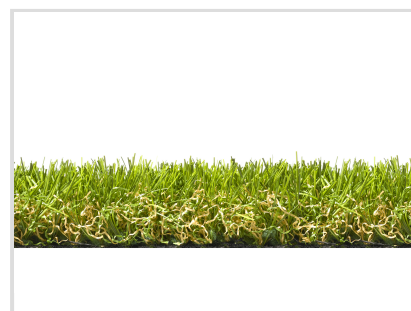


Flint

Type	Getuft grastapijt	
Materiaal	PE Monofilament recht & PP Monofilament gekroesd	
Garen type	5.000 / 8 dTex PE monofilament recht & 3.200 / 6 dTex PP monofilament gekroesd	
Garen kwaliteit	Milieuvriendelijk, vrij van lood en cadmium	
Primary backing	100% PP black with fleece, UV Stabilized, Gewicht 135 gr/m2	
Secondary backing	Black Latex compound with a base of styrenebutadiene (SBR), with drainage holes, Gewicht 836 gr/m2	
Waterdoorlaatbaarheid	60 liter per minuut per m2	
Poolhoogte	38 mm	
Tuft gewicht	2.000 gr/m2	± 10%
Totaal gewicht	2.971 gr/m2	± 10%
Deling	3/8 deling	
Steken per 10cm	26	± 1
Steken per m2	27.300	± 10%
Kleur	Mix van licht en donker groen + groen / jute rootzone	
UV stabiliteit	Conform DIN 53387 Standaard (6000 uur)	
Kleur vastheid	Xenon Test: Blue Scale > 7, Grey-scale > 4	
Belijning	NVT	
Rol breedte	200 cm, 400 cm	
Rol lengte	20-25m	
Toepassingen	Tuin , Landscape	
Opvul advies	Silica zand, gradatie 0,5 - 1,0 mm, 80 % rondkorrelig, ± 6 - 8 kg/m2	
Opmerkingen	Check voor u gaat verleggen of alle rollen uit dezelfde productiebatch komen (eerste vijf cijfers van het rolnummer) Project.	

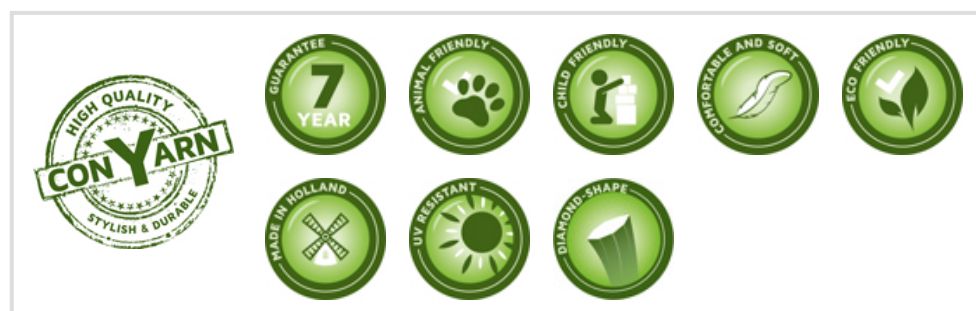

Condor Grass has the right to alter each product specification in order to improve the carpet according to the newest technological applications. Condor Grass is not legally liable in case of non-compliance with the above-mentioned specifications. The above mentioned specifications are for reference, and can only be used informal.